North

DC/20/0643/FUL

Installation of a Sewerage Pumping Station

22E Sole Bay Fish Company, Backshore, Southwold IP18 6ND



Site Location Plan



Hut for siting of pumping station




PLANNING NOTE THE EXISTING HUT WILL BE PARTIALLY DEMOUNTED AND LATER REINSTATED AFTER THE INSTALLATION WORKS OF THE PUMPING STATION HAVE BEEN COMPLETED, THERE WILL BE NO VISIBLE SIGN EXTERNALLY THAT ANY WORK HAS TAKEN PLACE AT ALL RAISING THE MANHOLE 900MM WITHIN THE SHED, WHICH WOULD NORMALLY BE AT GROUND LEVEL, IS PURELY BEING DONE FOR FLOOD ALLEVIATION, TO PROTECT THE PUMPING STATION FROM WATER INGRESS **NORTH WEST SOUTH EAST** DENOTES AREA OF PIT TO BE DUG 2,0M DEEP AND BACKFILLED AFTER PUMPING STATION INSTALLATION 215MM BRICKWORK RAISED WITHIN EXISTING HUT APPROX 900MM ABOVE THE GEMERAL GROUND LEVEL FOR FLOOD ALEVIATION ACCESS COVER TO PUMPING STATION **SOUTH WEST NORTH EAST**

EXISTING PLAN OF HUT

PROPOSED PLAN OF HUT

EXISTING AND PROPOSED ELEVATIONS (UNALTERED)

BRIAN HAWARD CHARTERED AND REGISTERED ARCHITECT THE ROPE HOUSE SOUTHWOLD

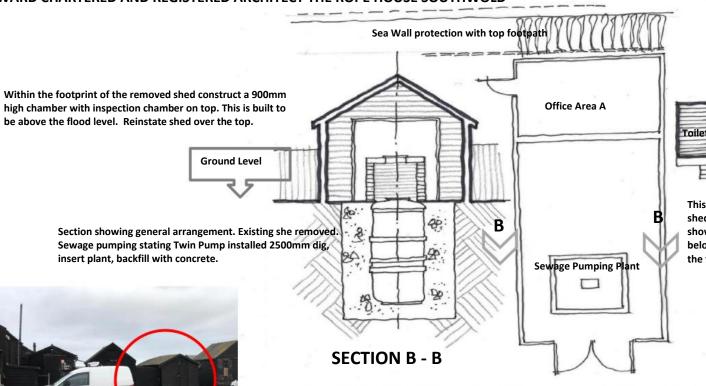


Sea Wall protection with top footpath

Toilets

Inspection chamber

This small block plan shows the shed used for the toilets, the shed between and the shed to be removed and replaced. It shows the inspection chamber below the toilet and the plant below the end shed and the connection underground between the two.

SITE BLOCK PLAN



GROUND FLOOR PLAN

This is the shed to be removed and replaced once the sewage pumping station has been installed. There will be no difference in appearance of the site once the project is complete.




This is the shed to be removed and replaced once the sewage numping station has been installed. There will be no difference in the appearance of the site once the project is complete.

This drawing is not to scale

This drawing indicates the principle of the installation and must not be used for pricing or for construction purposes

This drawing is to be read in conjunction with the drawing Wastewater Plan A4 showing the route of the pumped sewerage from the pumping station to the inspection chamber adjacent to the public toilets.

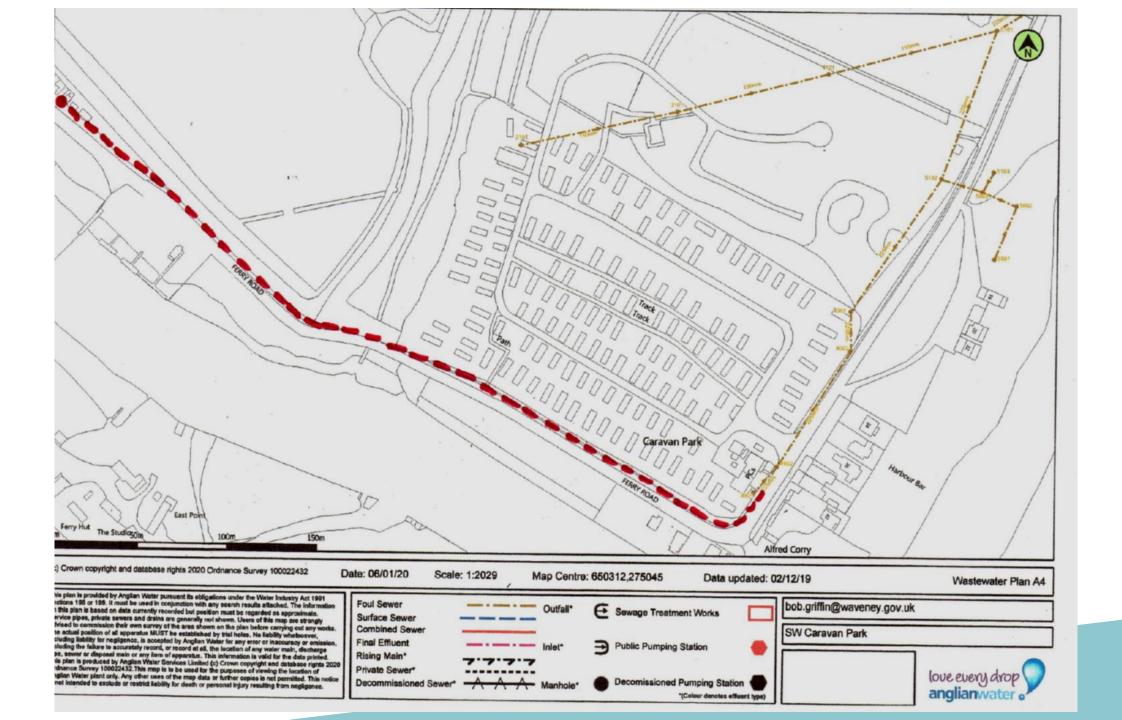

Recommendation

Approve subject to the conditions recommended in the report.